

FlexiROC D50 and D55

Surface drill rig for quarrying and mining

FlexiROC D50 hole diameter: 90–130 mm (3.5"– 5.12")

FlexiROC D55 hole diameter: 90–152 mm (3.5"– 6")



Efficient and versatile

The FlexiROC D50 and FlexiROC D55 from Epiroc are designed to be efficient and built to be solid and dependable. These well-proven machines are very versatile and are equally at home in either a quarry or a mine.

The FlexiROC D50 and D55 provide the optimum combination of air flow and air pressure which means high drilling economy and productivity. Both are built on a proven platform to ensure reliability and efficiency. Fitted with a standard feed, these workhorses excel

at production drilling and in auxiliary drilling applications such as toe-hole drilling. The reliable Epiroc DTH hammer is matched with a powerful air compressor – a proven and effective team even in the toughest mining conditions.



Real workhorses

Proven and dependable rigs for DTH drilling in mining and large quarry applications, the FlexiROC D50 and D55 are rugged and multifunctional. They are built to take on the toughest drilling demands and are ready to exceed your expectations.

+ Main benefits

High productivity thanks to the robust and powerful feeding system

Availability and serviceability due to high degree of parts commonality

Durability based on well-proven and trusted design

Proven workhorses for both quarries and mines

Designed round a proven platform, these rigs are very efficient. They also feature a standard feed, which means they not only excel in production drilling, but also in auxiliary applications such as toe-hole drilling.



+ Built on years of experience in mining and quarrying

A reliable DTH hammer teamed-up with a powerful air compressor is a proven and effective combination – even in the toughest mining conditions. As a world-leader in mining equipment, Epiroc has equipped both the FlexiROC D50 and the FlexiROC D55 with advanced DTH technology and robust compressors. Both work together to deliver straight and smooth holes along with plenty of air to keep the hole clean.



+ Maximum drilling time means increased productivity

The FlexiROC D50 and FlexiROC D55 have long service intervals and few parts. They also have a high degree of service and parts commonality with other rigs in the Epiroc family. Two examples of shared design are the heavy duty chain feeding system and the robust and fast rod-handling system. Epiroc provides security and peace of mind, so you can concentrate on your profit and growth.



+ Uniform feeding

Epiroc's FlexiROC DTH family ensures smooth and uniform feeding regardless of rock conditions. The aluminum feed profile cuts harmful vibrations down to a minimum, leading to optimum transmission of each percussive blow to fresh rock and no wasted air.



A comprehensive service offering

Even the best equipment needs to be serviced regularly to make sure it sustains peak performance. An Epiroc service solution offers peace of mind, maximizing availability and performance throughout the lifetime of your equipment. We focus on safety, productivity and reliability.

By combining genuine parts and an Epiroc service from our certified technicians, we safeguard your productivity – wherever you are.

Technical specifications

Main Components

- Crawler type two speed undercarriage with track oscillation system
- ROPS and FOPS-approved cabin with rubber vibration dampers
- Single section boom system
- Toe hole drilling capability
- Carousel type rod-handling system
- Pressure regulated break-out table
- Service hand lights inside canopy

Hole range & length (recommended)

		Metric	US
FlexiROC D50	QLX 35, COP 44 Gold	90-130 mm	3.63'-5.12'
FlexiROC D55	QLX 35, COP 44 Gold, COP 54 Gold	90-152 mm	3.63'-6'
Hydraulic tube handling system for max hole length, with 5 m (16,4') tubes – standard feed			
FlexiROC D50 & D55	Ø 76-102 mm (3'- 4') drill rods	45 m	148'
Single pass drilling, max hole length			
FlexiROC D50 and D55 standard feed		5,4 m	18'

Engine

FlexiROC D50	Metric	US
CAT C11 turbo-charged diesel engine, Tier 3/EU Stage IIIA - power rating at 1800 rpm	287 kW	385 HP
CAT C13 turbo-charged diesel engine, Tier 4 Final / EU Stage IV - power rating at 1 800 rpm	287 kW	385 HP
FlexiROC D55	Metric	US
CAT C13 turbo-charged, diesel engine, Tier 3/Stage IIIA, Tier 4 final /Stage IV - power rating at 1 800 rpm	328 kW	440 HP

Electrical system

Voltage	24 V
Batteries	2 x 12 V, 235 Ah
Alternator	28 V, 95 Ah
Work lights, front	4 x 70 W
Work lights, rear	2 x 70 W
Work lights, feed	2 x 70 W
Warning lamp and reverse buzzer	

Rotary head

	Connection thread	Max rpm	Max torque, drilling		Suitable for DTH-hammer
			Metric	US	
DHR6 H 45	API 2 3/8" REG, box	137	1 839 Nm	1 356 lbf	COP 44 Gold (COP 54 Gold)
DHR6 H 56	API 3 1/2" REG, box	107	2 353 Nm	1 735 lbf	COP 54 Gold

Compressor

Atlas Copco XRX 10 two-stage screw type compressor

FlexiROC D50	Metric	US
Working pressure, max	25 bar	363 psi
FAD at 25 bar	295 l/s	625 cfm
FlexiROC D55	Metric	US
Working pressure, max	30 bar	435 psi
FAD at 30 bar	354 l/s	729 cfm

Aluminum feed

Aluminum profile feed with hose guide and double drill tube support with break-out table and movable lower guide/dust hood	Metric	US
Feed rate, max	0.9 m/s	177 ft/min
Feed force, max	40 kN	8 992 lbf
Tractive pull, max	50 kN	11 240 lbf
Feed motor size	2099 cc	0.6 US gal
Chain size	45 mm	1.8"
Feed extension	1 900 mm	74.8"
Travel length	5 400 mm	212.6"
Total length	9 400 mm	370"

Hydraulic system

Hydraulic oil cooler	Metric	US
Max ambient temperature	50°C	122°F
Pumps		
Axial piston pump (1)	240 L/min	63 gal/min
Gear pump (2)	111 L/min	29 gal/min
Gear pump (3)	63 L/min	16.6 gal/min
Gear pump (4)	39 L/min	10.3 gal/min
Gear pump (5)	31 L/min	8.2 gal/min
Gear pump (6)	31 L/min	8.2 gal/min
Return and drainage filters (2 x 3 filters)		
Filtration rate	20 µm absolute	


Carrier

	Metric	US
Tramming speed, max	3.2 km/h	2.0 mph
Traction force, max	112 kN	25 179 lbf
Ground clearance	405 mm	16"
Track oscillation		±10'

Volumes


	Metric	US		Metric	US
Hydraulic oil tank	380 l	100 gal	Diesel engine, cooling water, Tier 4	110 l	29 gal
Hydraulic system, total	600 l	158 gal	Diesel engine fuel tank	1050 l	277 gal
Compressor oil	80 l	21 gal	Traction gear	3 l	0.8 gal
Diesel engine oil	44 l	11.6 gal	Lubrication tank (HECL + ECL)	20 l	5.3 gal
Diesel engine, cooling water, Tier 3	65 l	17 gal	DEF fluid tank (Tier 4 final only)	34 l	9 gal

Technical specifications

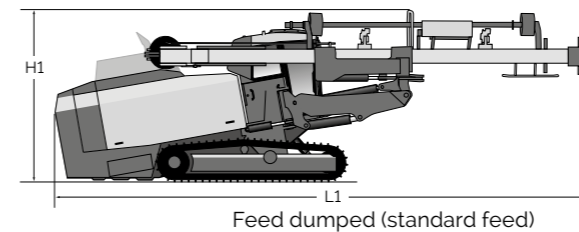

Height and length

Standard Feed (SF) dumped	Metric	US
Height (H1)	3 500 mm	138'
Length (L1)	11 350 mm	447'
Feed height	Metric	US
Standard Feed (H2)	9 400 mm	370'

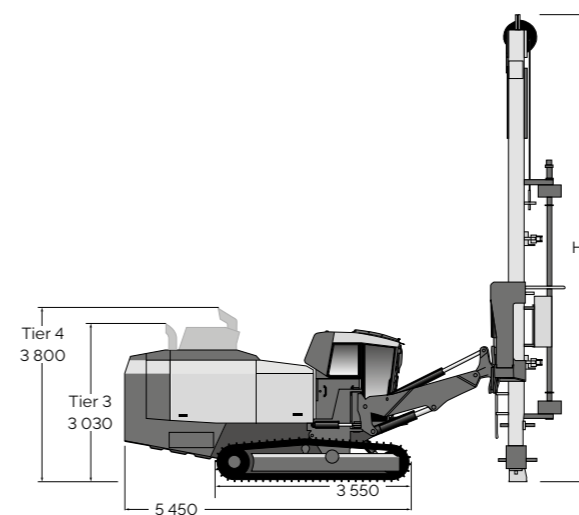

Weight

Standard unit excluding all options and drill rods	Metric	US
FlexiROC D50	21 900 kg (T3)	48 280 lb
	22 300 kg (T4)	49 160 lb
FlexiROC D55	22 100 kg (T3)	48 720 lb
	22 500 kg (T4)	49 600 lb

Cabin

- ROPS and FOPS-approved with rubber vibration dampers
- Fire extinguisher 6 kg (13 lbs) dry chemical ABE class III type
- 2 x wipers with washer (front and roof windows)
- Outlet socket 24 V, rig inclination indicator
- Clear laminated glass (front and roof windows)
- Combined front mounted platform/ tool box
- Clear toughened glass (side and rear windows)
- Electric combined inclination/ hole depth instrument
- Fully adjustable operator seat, cabin light, rear view mirror

A selection of options

Carrier

- Hydraulic support leg
- Protection hand rails on top of canopy
- Wide body kit
- Halogen work light covering feed support, transport position
- LED work lights
- Heavy duty air intake filters for engine and compressor
- Combined warning sound and warning light, beacon type
- Manually or automatic ansul fire extinguisher system
- Tropical kit for 55° ambient temperature
- Electric pump for filling hydraulic oil
- Electric fuel filling pump
- Fast fuel filling system
- Cold weather kit +5° C to -25° C, including diesel engine heater
- Cold weather kit -25° C and below, including diesel engine heater, prepared for ether start.

Cabin

- Rubber ladder for left hand side
- Clear laminated glass (front and roof windows)
- Tinted toughened glass (side and rear windows)
- Sun shade kit
- Electric heated seat
- Radio/CD or Radio/DVD
- Reverse camera with cab-mounted monitor

Feed

- Rod Handling System 140
- Screw sampler
- Service winch with jib boom mounted on the feed
- Wide feed foot
- Protective guard, according to EN16228

Water mist system

- Water mist system, pump, one or two 400 l water tanks
- Artic-ready water mist system, pump, one or two 400 l water tanks

Lubrication

- Central lubrication system, type Lincoln
- Thread lubrication, spray system
- Artic hydraulic oil, VG 32
- Tropical hydraulic oil, VG 68
- Biological hydraulic oil, VG 46

Hole and Inclination systems




- Aiming unit function to standard instruments
- GPS compass aiming unit
- Laser receiver

Automation and software

- Production log for ROC Manager

Parts and Services products

- ROC Care
- CERTIQ satellite based drill rig monitoring system (only in combination with a written service agreement)
- Delivered equipment, not mounted
- First 50 hours service kit for compressor
- Tool kit for rotary head with fixed spindle sub
- Tool kit for rotary head with floating spindle sub

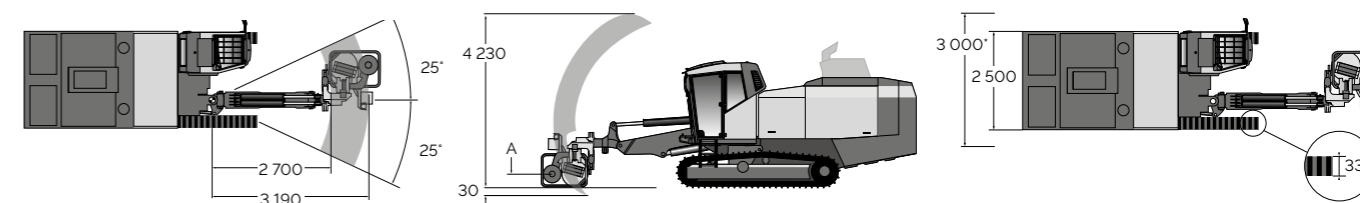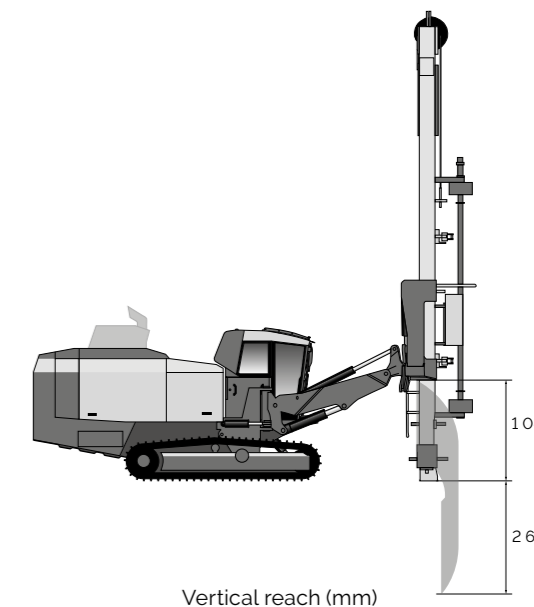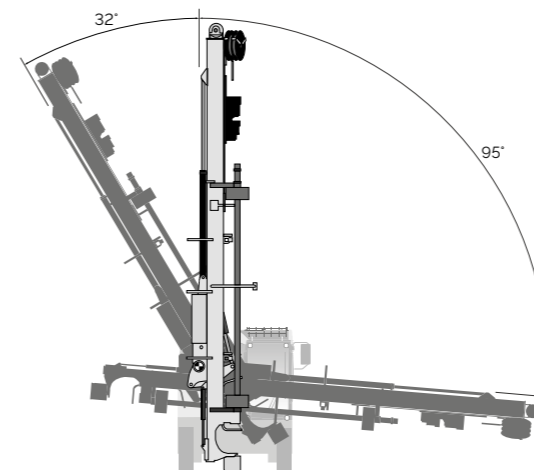



9868 0167 01 2019-04 Orebro, Sweden. Legal Notice © Copyright 2019, Epiroc Rock Drills AB, Orebro, Sweden. All product names in this publication are trademarks of Epiroc. Any unauthorized use or copying of the contents or any part thereof is prohibited. Illustrations and photos may show equipment with optional extras. No warranty is made regarding specifications or other use. Specifications and equipment are subject to change without notice. Consult your Epiroc Customer Center for specific information.

United in performance. Inspired by innovation.

Performance unites us, innovation inspires us, and commitment drives us to keep moving forward. Count on Epiroc to deliver the solutions you need to succeed today and the technology to lead tomorrow.
epiroc.com

